



MAKING YOUR HOME



TRULY YOURS

uplifts
BY STANNAH



Full height door



Through the floor opening



Ambient lighting



S2.



Maximum internal cabin dimensions	29in x 30/37in
Minimum internal width	30in
Maximum internal width	37in
Homelift entrance	Easy access ramp
Floor cut out	42in x 35in
Entrance width	31in
Maximum load	375lbs
Maximum travel	11ft 6in
Minimum upper floor ceiling height	Standard 96in Compact 90in
Minimum lower floor ceiling height	Standard 90in Compact 84in


DIMENSIONS



Full height door



Intuitive controls

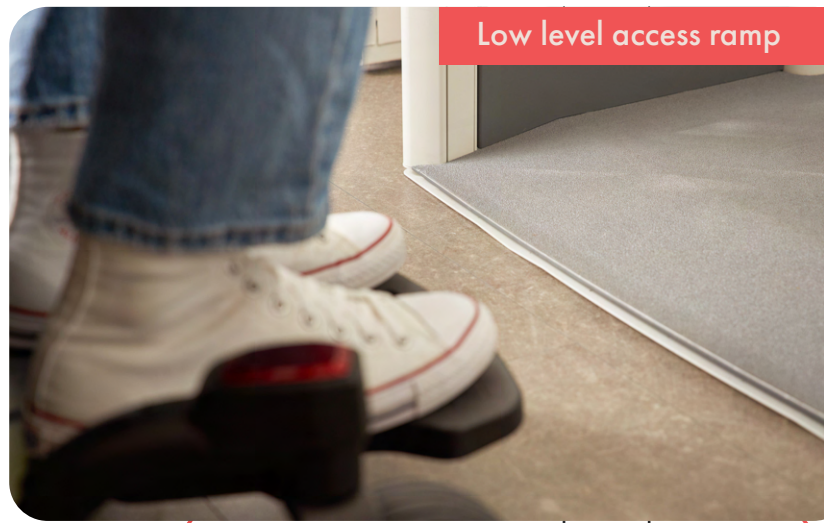

Low level access ramp

S3.



Maximum internal cabin dimensions	45in x 30/37in
Minimum internal width	30in
Maximum internal width	37in
Homelift entrance	Easy access ramp
Floor cut out	42in x 52in
Entrance width	31in
Maximum load	500lbs
Maximum travel	14ft
Minimum upper floor ceiling height	Standard 96in Compact 90in
Minimum lower floor ceiling height	Standard 90in Compact 84in

DIMENSIONS



Bench seat



Folding seat



Handrail

Technical data



Drive	Compact Winding Drum
Power supply	220V – 20A
Power source	Dedicated Circuit with Shutoff
Noise level (decibel)	Less than 60db
Maximum speed	20 fpm
Standards compliance	ASME A17.1:2019 / CSA B44:19
Controls	Intuitive Push Button
Communications device	Integrated in Cab
Warranty	2 Years Parts / 5 Years Motor & Drive



USA:

stannah.com/en-us/homelifts

Canada:

stannah.com/en-ca/homelifts



Please note that some models, features, and options shown may change as we continue to enhance our offerings.